

## Settings & Preferences

Upon the initial power up, PASSPORT Max International will ask you to select your preferred language.

Press the **- VOLUME +** button to scan through available languages.

Press the **SEN** button once to select language.

Press the **SEN** button a second time to confirm language.

*NOTE: Selecting Language during the first startup will automatically select radar and laser band defaults for that market.*

Press MRK to go from one category to the next		Press VOLUME + or - to change your setting within a category
User Mode	<b>Advanced* Novice</b>	Access and customize all Settings and Preferences Access and customize units and display color, (all other Settings are set to factory defaults) <i>NOTE: Switch back to advance mode to view all Preferences</i>
Pilot	<b>Scan Bar* Full Word</b>	Scanning Bar with Full Word Full Word: Auto, Auto NoX, or Highway
Display Color	<b>Blue*/Green/Red/Amber</b>	Set color to match your vehicle's dash display
Speed Display	<b>On* Off</b>	Displays current speed Displays battery voltage
Cruise Alert	<b>Off / 20-160 KPH 20 KPH*</b>	Offers double beep alert tones below specified speed
Over Speed	<b>Off / 20-160 KPH 110 KPH*</b>	Reminds you when you exceed a specified speed up to 160 KPM
Meter Mode	<b>Standard* Spec Expert Simple</b>	Single band with bar graph of signal strength Single band with numeric frequency Multiple bands with bar graph of signal strengths Simple messages replace bands: <b>Caution</b> (if traveling below cruise alert limit) <b>Slow Down</b> (if traveling above cruise alert limit)
Tones	<b>Standard* Mild</b>	Standard ESCORT alert tones Mild doorbell chime alert tones
AutoMute	<b>On* / Off</b>	Automatically reduces audio during alert
AutoLearn	<b>On / Off*</b>	Automatically stores and locks out false alarms
Units	<b>English/Metric*</b>	Units for distance and speed
Language	<b>English*/SPN/RN/CHN</b>	Language for voice and text
Voice	<b>On* / Off</b>	Voice announcements
GPS Filter	<b>On* / Off</b>	Enables GPS-powered features
AutoPower	<b>Off</b>	Power turns on or off depending on your vehicle's ignition type (constant power or switched) Powers off automatically after 1 hour Powers off automatically after 2 hours Powers off automatically after 4 hours Powers off automatically after 8 hours <i>NOTE: AutoPower only works with constant power ignition</i> <i>NOTE: If auto power is on, the displays screen goes blank after 30 minutes to save screen life. Display screen will turn on automatically after you reach 10 KPH</i>

6

Band Enables	On / Off*	Default Settings: International*. Customize the bands you want to monitor. <i>NOTE: During Startup is the only time PASSPORT Max International automatically sets radar bands for different market using your choice of language.</i>
<b>Press SEN to go from one band category to the next</b>		
X Band	<b>On / Off*</b>	Freq: 10.475 - 10.575 GHz
K Band	<b>On* / Off</b>	Freq: 23.950 - 24.250 GHz includes Iskra 1/2 and K Pulse <i>NOTE: Includes Iskra and K Pulse detection. When K Band is off you can select separate segments of the band to turn on or off</i>
K1	<b>On* / Off</b>	Freq: 23.950 - 24.109 GHz
K2	<b>On* / Off</b>	Freq: 24.110 - 24.174 GHz
K3	<b>On* / Off</b>	Freq: 24.175 - 24.250 GHz
Strelka Band	<b>On / Off*</b>	Strelka Detection Freq: 24.150 - 24.160 GHz Std Meter bar.
MultaRadar CD Band	<b>On* / Off</b>	MultaRadar CD detection Freq: 24.030 - 24.150 GHz.
<b>Press VOLUME + or - to change your setting within a category</b>		
Ka Band	<b>On* / Off</b>	Freq: 33.400 - 36.000 Ghz <i>NOTE: When Ka Band is off, you can select separate segments of the band to turn on or off</i>
KaN1	<b>On* / Off*</b>	Freq: 33.400 - 33.700 GHz
KaN2	<b>On* / Off*</b>	Freq: 33.700 - 33.900 GHz
KaN3	<b>On* / Off</b>	Freq: 33.900 - 34.200 GHz
KaN4	<b>On* / Off</b>	Freq: 34.200 - 34.400 GHz
KaN5	<b>On* / Off*</b>	Freq: 34.400 - 34.600 GHz
KaN6	<b>On* / Off</b>	Freq: 34.600 - 34.800 GHz
KaN7	<b>On* / Off*</b>	Freq: 34.800 - 35.400 GHz
KaN8	<b>On* / Off</b>	Freq: 35.400 - 35.600 GHz
KaN9	<b>On* / Off*</b>	Freq: 35.600 - 35.800 GHz
KaN10	<b>On* / Off*</b>	Freq: 35.800 - 36.000 GHz
Laser	<b>On* / Off</b>	All laser guns 5- 40 KHz, Polyscan, Amata, and Tru-Cam
Marker Enable	<b>On* / Off</b>	Other, Red Light Camera, Red and Speed Camera, and Average speed cams. Unit will be loaded with EU, AU-NZ, and China DEFENDER database <b>Modified</b> Customize the types of locations you want to mark for future reference
<b>Press SEN to go from one marker category to the next</b>		
Other	<b>On* / Off</b>	Other location
Redlight	<b>On* / Off</b>	Red light camera
Red & Speed	<b>On* / Off</b>	Red light & speed camera
Speed Cam	<b>On* / Off</b>	Speed camera
Speed Trp	<b>On* / Off</b>	Speed trap
Avg Speed Cam	<b>On* / Off</b>	Speed camera
HOV Lane	<b>On* / Off</b>	High Occupancy Lane Camera
Clear Locations	<b>Marked Lockouts Defender Format</b>	Clear all user Marked locations. Press SEN button to confirm Clear all lockouts. Press SEN button to confirm Clear all DEFENDER data. Press SEN button to confirm Clear DEFENDER database, all markers, and all lockouts Press SEN button to confirm

\*Default Setting

7

## Contact Us

Visit [EscortRadar.com/manuals](http://EscortRadar.com/manuals) for the PASSPORT Max International Owner's Manual.

To view serial number and software revision press MRK and MUTE while powering on the detector.

To restore PASSPORT Max International to its original factory Settings, press and hold SEN and BRT while turning the power on. A "Restored" message will display, acknowledging the reset.

### Software Updates

PASSPORT's red light, speed camera, and average speed camera database is easily updated using our exclusive detector software tools found on our web site. Firmware, or the operating software for the detector, can also be updated using these tools.

In order to have access to these updates, you must register your PASSPORT at [www.EscortRadar.com/productregistration/](http://www.EscortRadar.com/productregistration/)

Once registered, you will receive email notifications that updates are now available for your firmware. Update monthly for the latest DEFENDER database. To handle your software and DEFENDER updates you need to connect your PASSPORT Max International to a computer first. You can connect Max to a computer via USB/USB Mini B cable.

8

INTERNATIONAL

# ESCORT®

GPS Powered for Speed and Location Intelligence

55 OSP 49 Highway

Open →

## PASSPORT® MAX

**High Definition Radar Performance**

Spanish

Chinese

Russian

Pre-loaded DEFENDER Database

RADAR • LASER • SAFETY CAMERA • DETECTOR

Quick Reference

## Congratulations



You've just purchased the first and only radar/laser detector to offer high-definition (HD) performance and accuracy—the **all new PASSPORT Max International**.

Go to [EscortRadar.com/manuals](http://EscortRadar.com/manuals) for full featured Owner's Manual.



PASSPORT Max features a new multi-color OLED display. Brilliant graphics illuminate intuitive icons that identify the type of threat at a glance.

## Max International Features

- PASSPORT Max International's HD Performance accurately identifies real threats sooner than any other detector, providing more advanced warning when you need it.
- Voice and text alerts for multiple languages including English, Spanish, Chinese, Russian.
- High-performance detection of latest radar threats including Strelka, Iskra and MultaRadar.
- High-performance detection of latest laser threats including Amata, Laser TruCam and Polyscan.
- PASSPORT Max International gives you access to ESCORT's **DEFENDER** Database, which warns you of verified speed traps, speed cameras, average speed cameras, and red light cameras.
- PASSPORT Max International's GPS location-based intelligence automatically locks out false alerts and allows you to mark locations for future reference.



## Installation

### Mounting Tips:


- Center of windshield between driver and passenger.
- Ensure clear view of road ahead and sky above.
- Avoid windshield wipers and heavily tinted areas.

### To mount Max International in your vehicle:

- 1 Remove backing from StickyCup mount.
- 2 Firmly press StickyCup onto windshield and flip locking clamp to secure.
- 3 Slide PASSPORT Max International mounting slot onto mounting bracket and push back gently to lock into place.
- 4 To adjust view, loosen thumb wheel and adjust angle of mounting bracket. Tighten thumb wheel to secure.

### StickyCup Care Instructions:

To clean your StickyCup, simply rinse under warm water, gently wipe off any debris and allow to air dry.

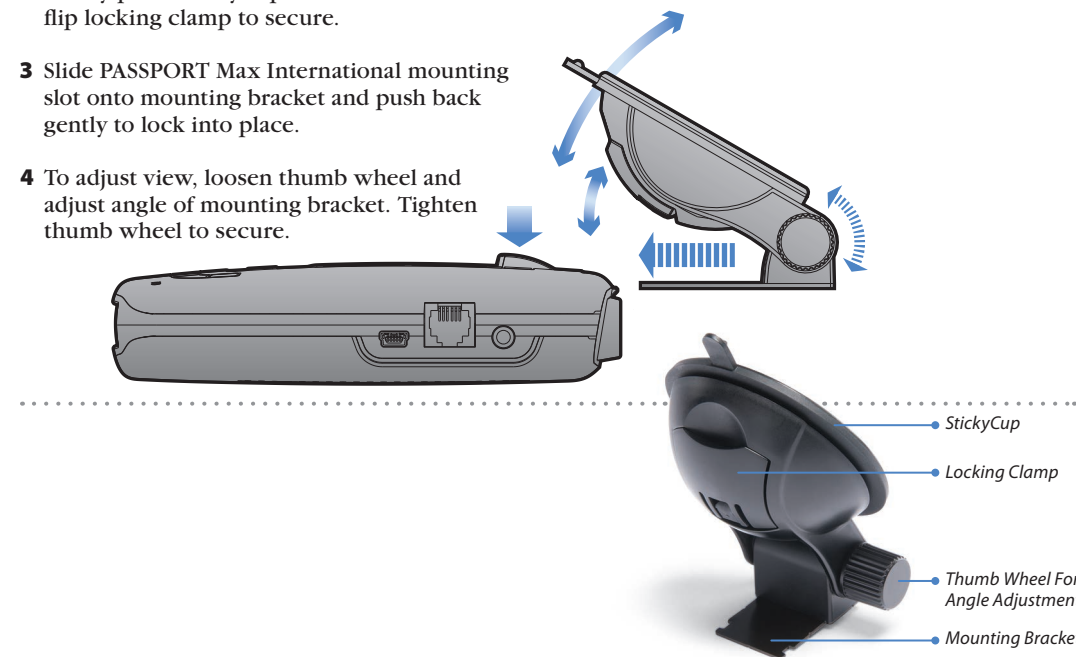

**I N T E R N A T I O N A L**  
HIGH DEFINITION RADAR PERFORMANCE

2


3

## Controls & Features

### Using PASSPORT Max International

- 1 Plug small end of SmartCord into modular jack on PASSPORT Max International and large end of SmartCord into your car's lighter/accessory socket.
- 2 PASSPORT Max International should power on automatically. If not, press the device's power button.
- 3 Upon initial power-up, PASSPORT Max International will ask you to select your preferred language. Press the **- VOLUME +** button to scan through available languages then press the **SEN** button once to select language and press **SEN** a second time to confirm language.

*NOTE: You can easily access and customize all of your Settings and Preferences by pressing and holding the MRK and SEN buttons. See Settings & Preferences for details.*

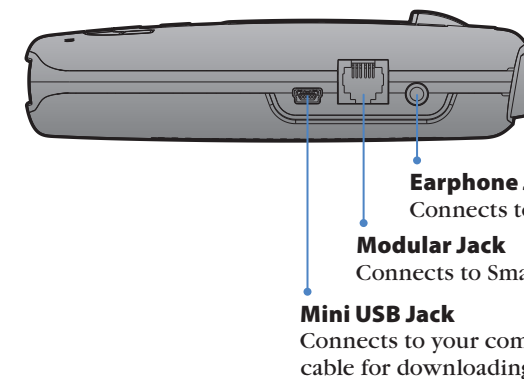

- **Earphone Jack**  
Connects to optional 3.5 mm stereo earphone.
- **Modular Jack**  
Connects to SmartCord for powering your device
- **Mini USB Jack**  
Connects to your computer via USB A/mini B cable for downloading software updates


### Using SmartCord

- **Mute Button:** Press to mute an alert; press three times to lock out a false alert; press twice while receiving a locked-out alert to unlock.
- **Alert Light:** Blinks orange when receiving an alert.
- **Power Light:** Lights blue when receiving power.



- **Modular Connector**  
Plugs into detector jack
- **Lighter Adapter**  
Connects to lighter/accessory socket

4

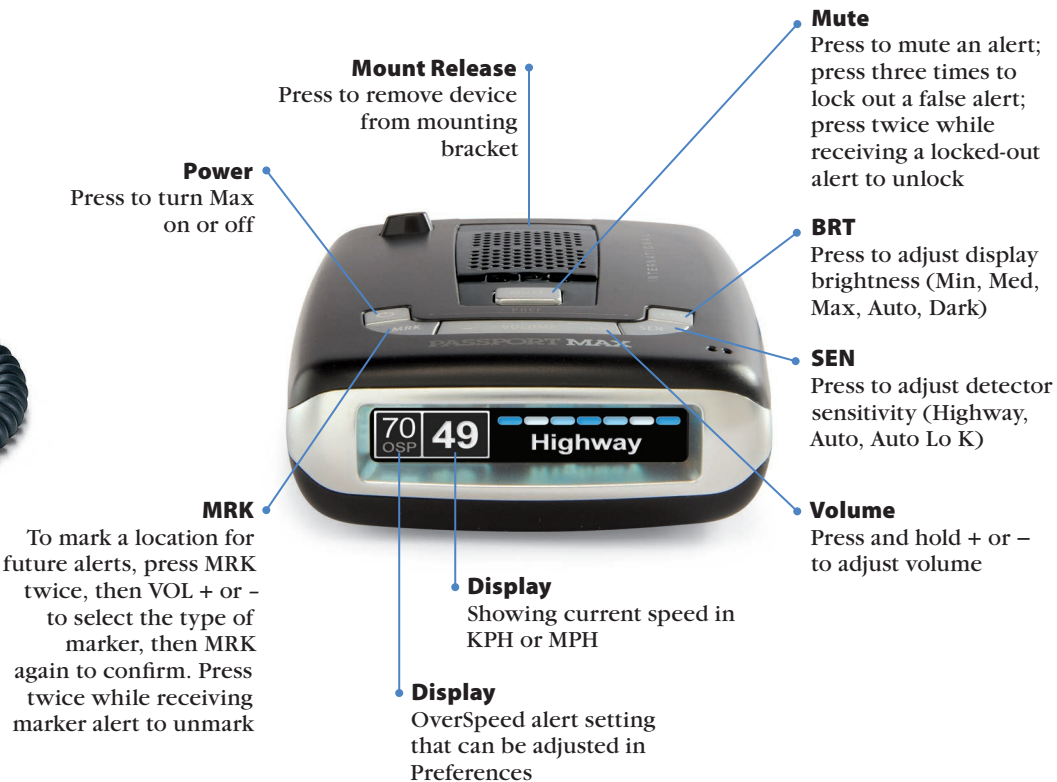

- **Power**  
Press to turn Max on or off
- **Mount Release**  
Press to remove device from mounting bracket
- **Mute**  
Press to mute an alert; press three times to lock out a false alert; press twice while receiving a locked-out alert to unlock
- **BRT**  
Press to adjust display brightness (Min, Med, Max, Auto, Dark)
- **SEN**  
Press to adjust detector sensitivity (Highway, Auto, Auto Lo K)
- **Volume**  
Press and hold + or - to adjust volume
- **MRK**  
To mark a location for future alerts, press MRK twice, then VOL + or - to select the type of marker, then MRK again to confirm. Press twice while receiving marker alert to unmark
- **Display**  
Showing current speed in KPH or MPH
- **Display**  
OverSpeed alert setting that can be adjusted in Preferences

5

Continued →