


ESCORT®

ESCORT®

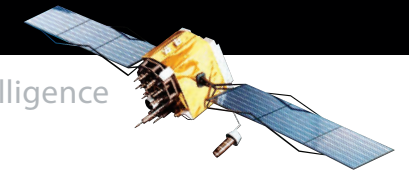

GPS Powered for Speed and Location Intelligence

INTERNATIONAL



PASSPORT® MAX

High Definition Radar Performance

Designed in the USA
ESCORT Inc.
5440 West Chester Road
West Chester OH 45069
800.433.3487
EscortRadar.com

©2014 ESCORT Inc. ESCORT®, PASSPORT® Max International, Escort Live!™, DEFENDER®, and SmartCord™ are trademarks of ESCORT Inc.

Manufactured and printed in Canada. Features, specifications, and prices subject to change without notice.



Spanish



Chinese



Russian

Pre-loaded DEFENDER Database

Speed Camera



MultiRadar CD



Strelka Camera



Red Light Camera



R A D A R • L A S E R • S A F E T Y C A M E R A • D E T E C T O R

[Owner's Manual](#)



You've just purchased the first and only radar/laser detector to offer high-definition (HD) performance and accuracy—the all new **PASSPORT Max International**.

Go to EscortRadar.com/manuals for full featured Owner's Manual.



PASSPORT Max International features a new multi-color OLED display. Brilliant graphics illuminate intuitive icons that identify the type of threat at a glance.

- PASSPORT Max International's HD Performance accurately identifies real threats sooner than any other detector, providing more advanced warning when you need it.
- Voice and text alerts for multiple languages including English, Spanish, Chinese, Russian.
- High-performance detection of latest radar threats including Strelka, Iskra and MultaRadar.
- High-performance detection of latest laser threats including Amata, Laser TruCam and Polyscan.
- PASSPORT Max International gives you access to ESCORT's DEFENDER Database, which warns you of verified speed traps, speed cameras, average speed cameras, and red light cameras.
- PASSPORT Max International's GPS location-based intelligence automatically locks out false alerts and allows you to mark locations for future reference.




Getting Started	4	Settings & Preferences	10-11
Controls & Features	5-9	• How to use Preferences	10
• Max Detector	5	• Overview of Preferences	10-13
• SmartCord	5	Understanding Your Detector	14-16
• AutoPower	6	• Interpreting Alerts	14
• Volume	6	• How Radar Works	15
• Mute	6	• How Pop Works	15
• User Mode	6	• How Laser Works	15
• Display Color	6	• How TSR Works	15
• Display Brightness	6	• How Red Light Cameras Work	16
• Speed Display	6	• How Speed Cameras Work	16
• Radar Sensitivity	7	• How GPS Works	16
• TrueLock/Locking Out False Alerts	7	Troubleshooting	17
• AutoLearn	7	Software Updates	18
• Marking Locations	7-8	Contact Us	18
• Over-Speed Alert	8	Parts & Accessories	19
• Alert Tones	8	Warranty	19
• Voice Alerts	9		
• Signal-Strength Meter	9		
• Clearing the Database	9		
• Restoring Detector Settings	9		

What's Included

- Radar/laser detector unit
- StickyCup windshield mount
- SmartCord power adapter
- Quick Reference Guide
- Soft-shell case

Mounting Tips

- Center on windshield between driver and passenger.
- Ensure clear view of road ahead and sky above.
- Avoid windshield wipers and heavily tinted areas.

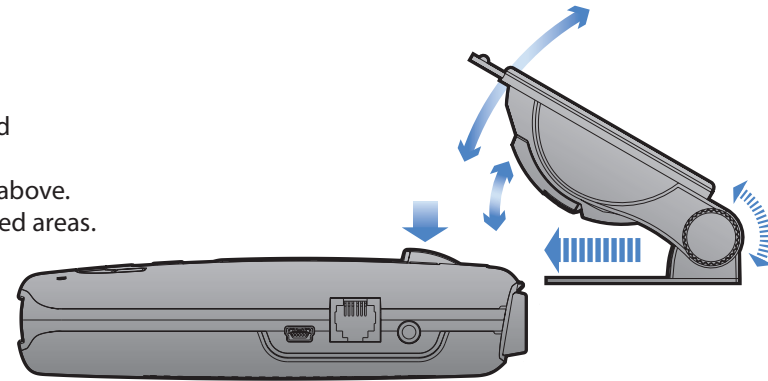


To mount in your vehicle:

- 1 Remove backing from StickyCup mount.
- 2 Firmly press StickyCup onto windshield and flip locking clamp to secure.
- 3 Slide Passport Max International mounting slot onto mounting bracket and push back gently to lock into place.
- 4 To adjust view, loosen thumb wheel and adjust angle of mounting bracket. Tighten thumb wheel to secure.
- 5 To remove detector, press mount release button or top of Passport Max International and slide device off mounting bracket.
- 6 To remove mount from windshield, release locking clamp and pull tab on top of StickyCup.



StickyCup Care Instructions


To clean StickyCup, simply rinse under warm water, gently wipe off any debris and allow to air dry.

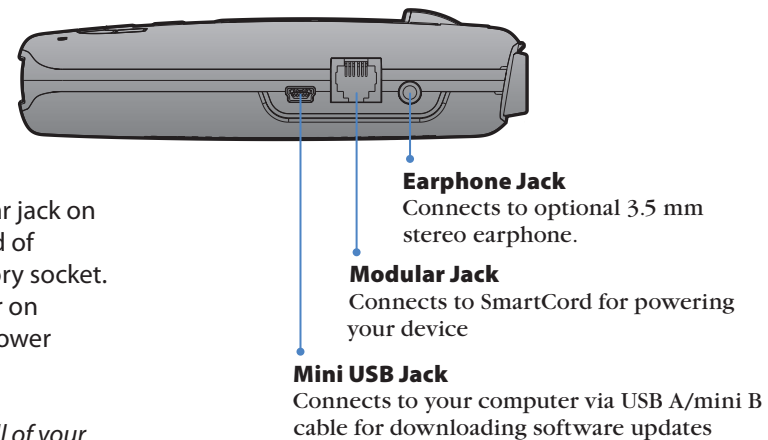

To begin using Passport Max International:

- 1 Plug small end of SmartCord into modular jack on Passport Max International and large end of SmartCord into your car's lighter/accessory socket.
- 2 Passport Max International should power on automatically. If not, press the device's power button.

NOTE: You can easily access and customize all of your settings and preferences by pressing and holding the MRK and SEN buttons. See the Settings & Preferences section for details.

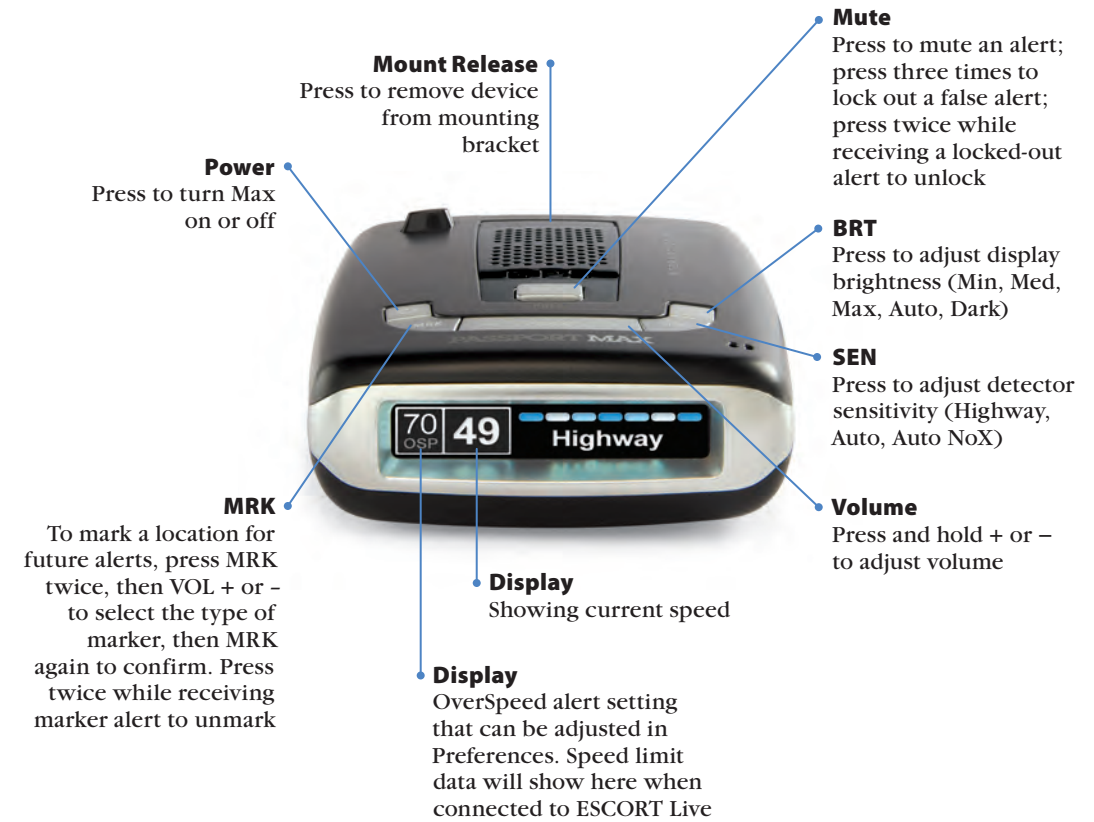

SmartCord

The SmartCord is a special power cord that has a power-on indicator, a bright alert light that warns of radar or laser, and a convenient MUTE button right on the plug. It's perfect for any car where reaching the detector's MUTE button on the windshield is a stretch. For discreet night driving, put Passport Max International in Dark mode and use the SmartCord for your visual alerts. Other drivers won't know you have a detector.

For descriptions of features and functions available when connected to SmartCord Live with ESCORT Live, visit escortinc.com and download the SmartCord Live user manual for your iOS or Android OS smartphone.



Modular Connector
Plugs into detector jack

Lighter Adapter
Connects to lighter/accessory socket

AutoPower

This feature automatically turns off Passport Max International after a set period of time to save unnecessary drain on your battery. This is especially useful if your vehicle has a constant-power ignition. See the Settings & Preferences section for details on how to customize the AutoPower feature.

NOTE: When AutoPower is ON, the display will go dark after the vehicle has been sitting still for 30 minutes, to save screen life. The screen will turn back on automatically once your vehicle reaches a speed of 10 mph.

Volume

To adjust Passport Max International to your preferred audio level for alerts, simply press and hold VOLUME + or -. The audio will increase/decrease while it is depressed. Once you reach the desired audio level, simply release the button. Passport Max International will retain this setting in its memory, even if the system is turned off.

Mute

The MUTE button allows you to silence the audio during an alert. Simply press the button during the alert. Once the radar encounter has passed, the mute will disengage, and the audio will return to your pre-set level. You can also silence an alert by pressing the SmartCord MUTE button.

AutoMute

Your Passport Max International also includes ESCORT's patented AutoMute feature. Once Passport Max International alerts you to a radar encounter at your selected volume level, it automatically reduces the volume more than 50%. This keeps you informed without the annoyance of a continuous full-volume alert. If you prefer, you can turn the AutoMute feature off. See the Settings & Preferences section for details.

SmartMute

If AutoMute has already reduced the volume for one alert and a higher-priority band is detected, Passport Max International will sound an alert at your set volume for the second band before adjusting the volume back down to the AutoMute level.

User Mode

Passport Max International offers two unique user modes:

Advanced


In this mode, you can access and customize all of Passport Max International's settings and preferences.

Novice

In this mode, you can access and customize units (English or metric) and display color only. All other preferences are set to the factory defaults. To view all preferences, you must switch back to Advanced mode.

Display Color

Your detector screen can be displayed with blue, green, red or amber accents to match the dashboard lighting of various vehicles. See the Settings & Preferences section for details on how to change the display color.



Display Brightness

Passport Max International's display brightness is automatically adjusted to suit ambient lighting conditions in your car. (The light sensor is located inside the controller, so the display may dim momentarily when you access the buttons.) If you prefer, you can press the BRT button to set a fixed brightness level:

- Auto** Automatically adjusts brightness (factory setting)
- Dark** Dark mode
- Minimum** Minimum brightness
- Medium** Medium brightness
- Maximum** Maximum brightness

NOTE: If you select Dark mode, the display will not provide any indication that it is on. Therefore, only audible alerts will notify you of detected signals.

Speed Display

Passport Max International displays your current speed just to the right of the Over-Speed Alert setting (or posted speed limit for your current location, if connect to ESCORT Live). If you prefer, you can turn off the speed display feature (see Settings & Preferences section for details). If speed display is OFF, PASSPORT Max will simply display your battery voltage in this location.



Speed display ON: Current speed



Speed display OFF: Battery voltage

Radar Sensitivity

The SEN button allows you to select your preferred radar sensitivity: Highway, Auto or Auto No X. In general, ESCORT recommends Auto for everyday driving.

Highway

In this setting, PASSPORT Max International will detect all radar signals on all bands at maximum range.

Auto

In this setting, Passport Max International will continuously analyze all incoming signals and intelligently adjust the sensitivity circuits, providing long-range warning with minimal false alarms.

Auto No X

Auto No X works the same as Auto mode; however, X band is completely turned off.

WARNING: Do not use Passport Max International in Auto No X unless you are absolutely certain that there are no traffic radar guns using X band in your area.

TrueLock/Locking Out False Alerts

Passport Max International is equipped with a TrueLock GPS Filter to lock out and store in its memory false alerts. To lock out a false alert (X band, K band or laser only), press the MUTE button on the detector or the SmartCord three times during an alert. Pressing the first time will silence the audio. Pressing a second time will generate a prompt on the display that will read "Lockout?" Press a third time to confirm you want to lock this signal out by location and frequency. A "Stored" message will be displayed.

Once a signal has been stored, Passport Max International will reject the signal the next time you approach this area and will display the locked-out alert.



Locked-out alert

To unlock a signal that has already been stored, simply press and hold the detector or SmartCord MUTE button while receiving the locked out alert. The display will read "Unlock?" Press the detector or SmartCord MUTE button again to unlock it from memory. The display will then read "Unlocked" to confirm your action.

For details on how to turn the GPS Filter off, refer to the Settings & Preferences section.

NOTE: When the GPS Filter is set to OFF, you do not have access to Passport Max International's other GPS-enabled features (e.g., DEFENDER Database alerts, marking locations, etc.).


AutoLearn

The AutoLearn feature analyzes (over time) the source of radar signals by location and frequency. This allows Passport Max International to determine if a signal is a real threat or a false one. If it determines that the signal is an automatic door opener, motion sensor, etc., it automatically locks out this source at this particular location. A "Stored" message will appear on the display when a signal has been automatically locked out. If you prefer, you can turn the AutoLearn feature off. See the Settings & Preferences section for details.

NOTE: AutoLearn typically needs to encounter the exact frequency in the same location approximately three times to lock it out. Since some door openers are turned on and off routinely, some variations may occur. When AutoLearn is on, Passport Max International will also unlearn signals to protect you from locking out real threats. If a particular signal is no longer present at a location that was previously locked out, Passport Max International will unlock that signal.

Marking Locations

The MRK button allows you to mark a specific location and label it for future reference. Once marked, Passport Max International will provide an alert when you reach this area again.



PASSPORT Max International gives an advanced warning of upcoming markers at the following distances:

- Red light cameras: 250 ft or 10 seconds
- Red light & speed cameras: 250 ft or 10 seconds
- Average speed cameras: 500 ft when traveling below 55 mph; 1,000 ft when traveling above 55 mph
- Speed traps: 0.3 mi or approximately 1,584 ft
- Other: 500 ft when traveling below 55 mph; 1,000 ft when traveling above 55 mph

To mark a location, press the MRK button. The display will read "Mark?" Press MRK again to bring up a menu of markers to choose from. Press VOLUME + or - to scroll through the markers, then press MRK to select the marker you wish to use at this location. The display will read "Marked!"

NOTE: When a location is marked the first time, you must travel at least 1 mile away from that location to receive an alert when you return to the area.

To unmark a location, touch the MRK button when you are receiving a marked-location alert. The display will read "Unmark?" Touch the MRK button again to confirm. The display will read "Unmarked!" To customize the types of markers you want to be able to set and receive, see the Settings & Preferences section.

Over-Speed Alert

With Passport Max International, you can set the Over-Speed Alert to notify you when you are traveling over a specified speed (factory default is 70 mph; see Settings & Preferences for details). When you travel above the speed threshold you have set, the background display for your current speed will turn red to alert you that you have exceeded the specified speed.



Alert Tones

Standard

Passport Max International's factory default for alert tones is the ESCORT Standard mode, in which Passport Max International uses a Geiger counter-type sound to indicate the signal strength and type of radar signal being encountered. When you encounter radar, a distinct audible alert will sound and will increase as the signal gets stronger. This allows you to judge the distance from the signal source without taking your eyes off of the road. Each band has a distinct tone for easy identification:

- X band = *beep tone*
- K band = *brap tone*
- Strelka band = *double-brap tone*
- MultaRadar CD = *double-brap tone*
- Ka band = *double-brap tone*
- Laser = *solid brap tone*
- Pop = *solid brap tone*

Mild

If you prefer, you can change your alert tone settings to Mild mode, which offers softer, simpler alert tones that are less obtrusive to the driving experience:

- X band, K band, Ka band and Pop = *Doorbell chime*
- Low signal strength = *Double chime*
- High signal strength = *Triple chime*

If alert remains in area more than 15 seconds = *Single chime (as a reminder)*

Laser = *Solid brap tone (Since laser signals are a possible threat no matter how weak, Passport Max International alerts you to all laser signals with a full laser alert.)*

See the Settings & Preferences section for details on switching your alert tones.

Cruise Alert


The Cruise Alert feature allows you to modify your alert tones when traveling below a specified speed (factory default is 20 mph; see Settings & Preferences for details). For all alerts received while traveling below the specified speed, PASSPORT Max international will sound a simple double-beep alert.

Voice Alerts

Passport Max International provides digital voice announcements for alerts and selection feedback. If you prefer, you can turn off the voice feature. See the Settings & Preferences section for details.

Signal-Strength Meter

Passport Max International offers four different settings for displaying alerts:



Standard

The **Standard** option provides information on a single radar signal. When Passport Max International detects radar, it displays the band of the radar (X, K or Ka) and a bar graph of the signal's strength. When laser is detected, the display will simply read "Laser." If there are multiple signals present, Passport Max International will determine which one is the most important threat to display.



SpecDisplay


The **SpecDisplay** option is an advanced display for experienced detector users. In this mode, it will display the actual numeric radar frequency being received. Even long-time detector users will require some time to get familiar with this new level of information about detected signals. To use SpecDisplay instead of the Standard bar graph meter, you must select it (Spec) in Preferences.



ExpertMeter

ESCORT's exclusive **ExpertMeter** option is also designed for the advanced detector user. To use the ExpertMeter instead of the Standard bar graph meter, you must select it (Expert) in Preferences.

ExpertMeter simultaneously tracks up to four radar signals: Ka band, X band, K band and X band. It shows each signal along with a bar graph of its strength. ExpertMeter can help you spot a change in your normal driving environment (e.g., a traffic radar unit being operated in an area where there are normally other signals present).



Simple

In this mode, **Simple** messages replace actual bands and signal strengths or frequencies. "Caution" is used when an alert is received while you are traveling below your current Cruise Alert setting. "Slow Down" is displayed when an alert is received while you are traveling above the current Cruise Alert setting.

NOTE: Passport Max International's selectable bands feature allows you to customize which bands are monitored. For details on modifying your band detection, see the Settings & Preferences section. For details on the various radar/laser bands and how they work, see the Understanding Your Detector section.

Clearing the Database

At some point, you may wish to clear some of the data in PASSPORT Max International's database. This may include any of the following: DEFENDER Database data, marked locations or locked-out locations. For details on how to clear, see the Settings & Preferences section.

Restoring Detector Settings

To restore Passport Max International to its original factory settings, press and hold the SEN and BRT buttons while powering on the detector. A "Restored" message will display, acknowledging the reset.

Upon initial power-up, PASSPORT Max International will ask you to select your preferred language. Press the **– VOLUME +** button to scan through available languages then press the **SEN** button once to select language and press **SEN** a second time to confirm language.

How to use Preferences

To access Preferences, press and hold both the MRK and SEN buttons. Passport Max International will display “Preferences,” indicating it is in program mode.

Once the unit is in Preferences mode, the MRK button is used to review the preference categories, and the VOLUME + AND – buttons are used to change the individual settings within the selected option.

To exit Preferences, simply wait a few seconds without pressing a button. The unit will display “Completed” and return to normal operation.

Example:

Here’s how you would turn the AutoMute feature off:

- 1** Enter Preferences by pressing and holding both the MRK and SEN buttons. Passport Max International will display “Preferences.”
- 2** Press the MRK button to scroll through the categories to “AutoMute.”
- 3** Since the factory setting is for AutoMute to be on, Passport Max International will show AutoMute as ON.
- 4** Press the VOLUME + or – button to change from ON to OFF.
- 5** To complete this change, simply wait a few seconds without pressing a button. The unit will display “Completed” to confirm your selection.

NOTE: You can only access and customize the AutoMute feature while in the Advanced user mode. See Overview of Preferences below for details on how to switch user modes.

Overview of Preferences

Press and hold the MRK and SEN buttons to access Preferences. To exit Preferences, simply wait a few seconds without pressing a button. The unit will display **Completed** to confirm your selections.

NOTE: AutoPower works only with constant-power ignitions.

NOTE: When AutoPower is ON, the display will go dark after the vehicle has been sitting still for 30 minutes, to save screen life. The screen will turn back on automatically once your vehicle reaches a speed of 10 mph.

To restore Passport Max International to its original factory settings, press and hold the SEN and BRT buttons while powering on the detector. A “Restored” message will display, acknowledging the reset.

To view your device’s serial number and software version, press and hold the MRK and MUTE buttons while powering on the detector.

Settings & Preferences

Upon the initial power up, PASSPORT Max International will ask you to select your preferred language.

Press the **- VOLUME +** button to scan through available languages.

Press the **SEN** button once to select language.

Press the **SEN** button a second time to confirm language.

NOTE: Selecting Language during the first startup will automatically select radar and laser band defaults for that market.

Press MRK to go from one category to the next		Press VOLUME + or - to change your setting within a category
User Mode	Advanced* Novice	Access and customize all Settings and Preferences Access and customize units and display color, (all other Settings are set to factory defaults) <i>NOTE: Switch back to advance mode to view all Preferences</i>
Pilot	Scan Bar* Full Word	Scanning Bar with Full Word Full Word: Auto, Auto NoX, or Highway
Display Color	Blue*/Green/Red/Amber	Set color to match your vehicle's dash display
Speed Display	On* Off	Displays current speed Displays battery voltage
Cruise Alert	Off / 20-160 KPH 20 KPH*	Offers double beep alert tones below specified speed
Over Speed	Off / 20-160 KPH 110 KPH*	Reminds you when you exceed a specified speed up to 160 KPM
Meter Mode	Standard* Spec Expert Simple	Single band with bar graph of signal strength Single band with numeric frequency Multiple bands with bar graph of signal strengths Simple messages replace bands: Caution (if traveling below cruise alert limit) Slow Down (if traveling above cruise alert limit)
Tones	Standard* Mild	Standard ESCORT alert tones Mild doorbell chime alert tones
AutoMute	On* / Off	Automatically reduces audio during alert
AutoLearn	On / Off*	Automatically stores and locks out false alarms
Units	English/Metric*	Units for distance and speed
Language	English*/SPN/RN/CHN	Language for voice and text
Voice	On* / Off	Voice announcements
GPS Filter	On* / Off	Enables GPS-powered features
AutoPower	Off 1 Hour 2 Hours 4 Hours* 8 Hour	Power turns on or off depending on your vehicle's ignition type (constant power or switched) Powers off automatically after 1 hour Powers off automatically after 2 hours Powers off automatically after 4 hours Powers off automatically after 8 hours <i>NOTE: If auto power is on, the display screen goes blank after 30 minutes to save screen life. Display screen will turn on automatically after you reach 10 KPH</i>

Band Enables **On / Off*** Default Settings: International*. Customize the bands you want to monitor.
NOTE: During Startup is the only time PASSPORT Max International automatically sets radar bands for different market using your choice of language.

	Press SEN to go from one band category to the next	Press VOLUME + or - to change your setting within a category
	X Band	On / Off* Freq: 10.475 -10.575 GHz
	K Band	On* / Off Freq: 23.950 -24.250 GHz includes Iskra 1/2 and K Pulse <i>NOTE: Includes Iskra and K Pulse detection. When K Band is off you can select separate segments of the band to turn on or off</i>
	K1	On* / Off Freq: 23.950-24.109 GHz
	K2	On* / Off Freq: 24.110-24.174 GHz
	K3	On* / Off Freq: 24.175-24.250 GHz
	Strelka Band	On / Off* Strelka Detection Freq: 24.150-24.160 GHz Std Meter bar.
	MultaRadar CD Band	On* / Off MultaRadar CD detection Freq: 24.030-24.150 GHz.
	Ka Band	On* / Off Freq: 33.400-36.000 Ghz <i>NOTE: When Ka Band is off, you can select separate segments of the band to turn on or off</i>
	KaN1	On / Off* Freq: 33.400-33.700 GHz
	KaN2	On / Off* Freq: 33.700-33.900 GHz
	KaN3	On* / Off Freq: 33.900-34.200 GHz
	KaN4	On* / Off Freq: 34.200-34.400 GHz
	KaN5	On / Off* Freq: 34.400-34.600 GHz
	KaN6	On* / Off Freq: 34.600-34.800 GHz
	KaN7	On / Off* Freq: 34.800-35.400 GHz
	KaN8	On* / Off Freq: 35.400-35.600 GHz
	KaN9	On / Off* Freq: 35.600-35.800 GHz
	KaN10	On / Off* Freq: 35.800-36.000 GHz
	Laser	On* / Off All laser guns 5- 40 KHz, Polyscan, Amata, and Tru-Cam
	Marker Enable	On* / Off Other, Red Light Camera, Red and Speed Camera, and Average speed cams. Unit will be loaded with EU, AU-NZ, and China DEFENDER database Modified Customize the types of locations you want to mark for future reference
	Other	On* / Off Other location
	Redlight	On* / Off Red light camera
	Red & Speed	On* / Off Red light & speed camera
	Speed Cam	On* / Off Speed camera
	Speed Trp	On* / Off Speed trap
	Avg Speed Cam	On* / Off Speed camera
	HOV Lane	On* / Off High Occupancy Lane Camera
	Clear Locations	Marked Clear all user Marked locations. Press SEN button to confirm Lockouts Clear all lockouts. Press SEN button to confirm Defender Clear all DEFENDER data. Press SEN button to confirm Format Clear DEFENDER database, all markers, and all lockouts Press SEN button to confirm

NOTE: Exceptions for Band Default Settings:

• *English and Spanish markets use Standard Default Settings.*

• *Russian market bands use Default Settings with Strelka On and the entire Ka Band Off.*

• *China market bands use Default Settings with entire Ka Band On.*

*Default Setting

Interpreting Alerts

Although Passport Max International has a comprehensive warning system, only experience will teach you what to expect from your detector and how to interpret what it tells you. The specific type of radar being used, the type of transmission (continuous or instant-on) and the location of the radar source affect the alerts you receive.

The following examples will give you an introduction to understanding your detector's warning system for radar and laser alerts.

Alert	Explanation
Detector begins to sound slowly; rate of alert increases until it becomes a solid tone. The signal meter ramps accordingly.	You are approaching a continuous radar source aimed in your direction.
Detector emits short alerts for a few seconds then falls silent, only to briefly alert and fall silent again.	An instant-on radar source is being used ahead of you and out of your view.
Detector suddenly sounds a continuous tone for the appropriate band received.	An instant-on radar or laser source is being used nearby. This kind of alert requires immediate attention.
Detector sends a brief laser alert.	Laser is being used in the area. Because laser is inherently difficult to detect, any laser alert may indicate a source very close by.
Detector receives weak signals. Signals may be a little stronger as you pass large, roadside objects. Signals increase in frequency.	A moving patrol car with continuous radar is overtaking you from behind. Because these signals are reflected (reflections are increased by large objects), they may or may not eventually melt into a solid point, even when the patrol car is directly behind you.
Detector alerts slowly for a while then abruptly jumps to a strong alert.	You are approaching a radar unit concealed by a hill or an obstructed curve.
Detector alerts intermittently. Rate and strength of alerts may be consistent or vary wildly.	A patrol car is traveling in front of you with a radar source aimed forward. Because signals are sometimes reflected off of large objects and sometimes not, the alerts may seem inconsistent.
Detector alerts intermittently; rate and strength of signal increases with each alert.	A patrol car is approaching from the other direction, sampling traffic with instant-on radar. Such alerts should be taken seriously.
Detector gives an X band alert intermittently.	You are driving through an area populated with radar motion sensors (e.g., door openers or burglar alarms). Since these transmitters are usually contained inside buildings or aimed toward or away from you, they are typically not as strong or lasting as a real radar encounter.

CAUTION: Overconfidence in an unfamiliar area can be dangerous. Likewise, if an alert in a commonly traveled area is suddenly stronger or on a different band than usual, speed radar may be set up nearby.

How Radar Works

Traffic radar, which consists of microwaves, travels in straight lines and is easily reflected by objects such as cars, trucks, and even guardrails and overpasses. Radar works by directing its microwave beam down the road. As your vehicle travels into range, the microwave beam bounces off your car, and the radar antenna looks for the reflections. Using the Doppler principle, the radar equipment then calculates your speed by comparing the frequency of the reflection of your car to the original frequency of the beam sent out.

Traffic radar has limitations, the most significant of these being that it typically can monitor only one target at a time. If there is more than one vehicle within range, it is up to the radar operator to decide which target is producing the strongest reflection. Since the strength of the reflection is affected by both the size of the vehicle and its proximity to the antenna, it is difficult for the radar operator to determine if the signal is from a sports car nearby or a semi truck several hundred feet away.

Radar range also depends on the power of the radar equipment itself. The strength of the radar unit's beam diminishes with distance. The farther the radar has to travel, the less energy it has for speed detection.

Because intrusion alarms and motion sensors often operate on the same frequency as X and K band radar, your detector will occasionally receive non-police radar signals. Since these X band transmitters are usually contained inside of a building or aimed toward the ground, they will generally produce much weaker readings than will a true radar encounter. As you become familiar with the sources of these pseudo alarms in your daily driving, they will serve as confirmation that the device's radar detection abilities are fully operational.



How POP Works

POP works by transmitting an extremely short burst, within the allocated band, to identify speeding vehicles in traffic. Once the target is identified, or "popped," the gun is then turned to its normal operating mode to provide a vehicle tracking history (required by law).

NOTE: According to radar gun manufacturers, tickets should not be issued in pop mode.

How Laser Works

Laser speed detection is actually light detection and ranging (LIDAR). Laser guns project a beam of invisible infrared light. The signal is a series of very short infrared light energy pulses that move in a straight line, reflecting off your car and returning to the gun. Laser uses these light pulses to measure the distance to a vehicle. Speed is then calculated by measuring how quickly these pulses are reflected, given the known speed of light.

Laser is a newer technology whose use is not as widespread as conventional radar; therefore, you may not encounter it on a daily basis. And unlike radar detection, laser is not prone to false alarms. Because laser transmits a much narrower beam than does radar, it is much more accurate in its ability to distinguish between targets and is also more difficult to detect. As a result, even the briefest laser alert should be taken seriously.

There are limitations to laser, however. Laser is much more sensitive to weather conditions than radar, and a laser gun's range will be decreased by anything affecting visibility, such as rain, fog or smoke. A laser gun cannot operate through glass, and it must be stationary to get an accurate reading. Because laser must have a clear line of sight and is subject to cosine error (an inaccuracy that increases as the angle between the gun and the vehicle increases), police typically use laser equipment parallel to the road or from an overpass. Laser can be used day or night.

How TSR Works

Passport Max International includes a new boost in anti-falsing software to eliminate excessive alerts from erroneous X and K band sources, such as traffic flow monitoring systems. These systems, which are becoming more widely used in several countries, generate K band signals to measure the flow of traffic on a given road. Unfortunately, most detectors see this as a real threat and will alert you to it unnecessarily. Our new proprietary software, TSR, intelligently sorts, ranks and rejects these types of false alarms automatically. The result is ultimate protection without excessive false alarms.



How Red Light Cameras Work

Red light cameras use three basic things: a camera, a device to trigger the camera and a computer. An intersection may have more than one camera to monitor traffic from multiple directions. The trigger is typically a series of wires buried just beneath the surface of the road. These wires are separated by a pre-set distance to create a magnetic field or induction loop. Once a vehicle is in the intersection, the loop or circuit becomes closed and alerts the computer to take a picture.


In some states, tickets are issued to the car's owner, no matter who's actually driving. In this case, the red light camera only needs to photograph the vehicle's rear license plate. In other states, the actual driver is responsible for paying the ticket. In this case, the system needs a second camera in front of the car to get a shot of the driver's face.

How Average Speed Cameras Work

There are several types of fixed position speed cameras used, including radar, laser, induction-loop and photo-based. Radar and laser based cameras are typically mounted near the road and transmit a short range signal across the lanes monitored. Since this signal is transmitted across the road instead of down the road like with many handheld systems, detecting them in time is critical.


Another technology used is an induction loop system. This type of system utilizes wires buried just beneath the surface of the road to trigger a computer that calculates speed between the two points. Photo based systems take two sets of pictures of all passing vehicles between two separate fixed locations. Both sets of photographs are date and time stamped, which enables the system to calculate average speed between the two locations.

Fixed speed cameras can also be set up to monitor one to four lanes of traffic in the same direction. To achieve this, a sensor is installed in each lane, and a wide angle camera lens is used to photograph the vehicle that is speeding.

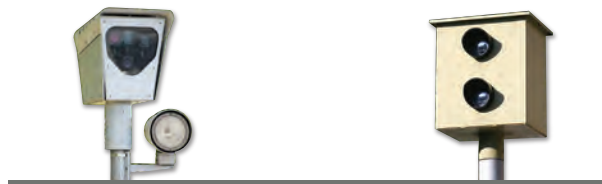

How GPS Works

Developed by the U.S. military, the global positioning system (GPS) is made up of 24 orbiting satellites. There are at least four satellites visible at any given time every day. A GPS receiver is designed to locate and receive data from four of these satellites. These data include the distance to your location from each of the satellites. Once the distance from each satellite is known, the receiver can calculate and pinpoint your exact location.



Problem

Explanation/Solution

Detector beeps briefly at the same location every day, but no radar source is in sight.

An X band motion sensor or intrusion alarm is located within range of your route.

Detector did not alert when a police car was in view.

VASCAR (Visual Average Speed Computer and Recorder), a stopwatch method of speed detection, may be in use.

Officer may not have radar or laser unit turned on.

Detector's audible alerts become softer after the first few alerts.

Detector is in AutoMute mode. See "AutoMute" in the Settings & Preferences section for details.

The power-on sequence reoccurs while you are driving.

A loose power connection can cause Passport Max International to be briefly disconnected and will retrigger the power-on sequence. Check all connections.

You wish to restore the factory default settings.

Press and hold the SEN and BRT buttons while powering on the detector. A "Restored" message will display, acknowledging the reset.

The device will not turn on.

Check that vehicle ignition is on.

Check all connections.

The display feels warm.

It is normal for the device to feel warm.

The display is blank.

Passport Max International is in Dark mode. Press the BRT button to adjust the brightness.

Software Updates

Visit EscortRadar.com/manuals for the PASSPORT Max International Owner's Manual.

To view serial number and software revision press MRK and MUTE while powering on the detector.

To restore PASSPORT Max International to its original factory Settings, press and hold SEN and BRT while turning the power on. A "Restored" message will display, acknowledging the reset.

Software Updates

PASSPORT's red light, speed camera, and average speed camera database is easily updated using our exclusive detector software tools found on our web site. Firmware, or the operating software for the detector, can also be updated using these tools.

In order to have access to these updates, you must register your PASSPORT at www.EscortRadar.com/productregistration/

Once registered, you will receive email notifications that updates are now available for your firmware. Update monthly for the latest DEFENDER database. To handle your software and DEFENDER updates you need to connect your PASSPORT Max International to a computer first. You can connect Max to a computer via USB/USB Mini B cable..

Contact Us

[www.escortradar.com/
dealer-locator](http://www.escortradar.com/dealer-locator)

Designed in the USA. Manufactured in Canada.

ESCORT Inc.
5440 West Chester Road
West Chester OH 45069

©2014 ESCORT Inc. Escort®, Passport® Max, Defender®, AFR®, TrueLock™, SmartShield®, SpecDisplay™, AutoSensitivity™, ExpertMeter™ and Cincinnati Microwave are trademarks of ESCORT Inc. Manufactured in Canada. Features, specifications and prices subject to change without notice.

FCC NOTE: Modifications not expressly approved by the manufacturer could void the user's FCC granted authority to operate the equipment.

FCC ID: QKLM5MAX

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received including interference that may cause undesired operation

Parts & Accessories

The following accessories and replacement parts are available for Passport Max International:

- Coiled SmartCord
- DirectWire SmartCord
- SmartCord Live
- SmartCord Live DirectWire
- SHIFTER ZR4™ Laser Shifting System
- Replacement detector cases

Visit EscortInc.com for selection and pricing.

Warranty

ESCORT One-Year Limited Warranty

ESCORT warrants your Passport Max International device against all defects in materials and workmanship for a period of one (1) year from the date of the original purchase, subject to the following terms and conditions:

The sole responsibility of ESCORT under this warranty is limited to either repair or, at the option of ESCORT, replacement of Passport Max International. There are no expressed or implied warranties, including those of fitness for a particular purpose or merchantability, which extend beyond the face hereof. Some states do not allow limitations on how long an implied warranty lasts, so the above limitations may not apply to you.

This warranty does not cover installation, removal or reinstallation charges. ESCORT is not liable for any incidental or consequential damages arising from the use, misuse, installation or mounting of Passport Max International. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

This warranty gives you specific rights. You may have other legal rights, which vary from state to state. This warranty does not apply if the serial number on the Passport Max International housing has been removed or if your Passport Max International device has been subjected to physical abuse, improper installation or modification.

FCC NOTE: Modifications not expressly approved by the manufacturer could void the user's FCC granted authority to operate the equipment.

FCC ID: QKLM5MAX

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received including interference that may cause undesired operation.